

# MemxPro M.2 2242 SATA EB31 Series

SLC like, 20K+ P/E cycles



## Features


- M.2 (NGFF) standard of 22mm wide, 42mm long
- StrongMLC, DRAM-less, up to 64GB capacity
- Commercial/extended/wide temp. solutions
- Built-in ECC and OCP/OVP
- NCQ/TRIM/SMART support
- mSMART storage device monitoring

## Specification

Product Model	M.2 2242 SATA EB31
Interface	SATA III
Form Factor	M.2 SATA (2242/S2/D2)
Flash Type	MLC
Max. Channel	4
Density	8GB~64GB
Sequential R/W (MB/sec, max.)	514/421
Operating Temperature	0°C~+70°C/-25°C~+85°C/-40°C~+85°C
Max. Power Consumption	0.825W (3.3Vx250mA)
Dimension (L x W x H/mm)	22x42x2.15 / 22x42x3.5
Operating Voltage	3.3V±5%
Storage Temperature	-55°C~+95°C
External DRAM Buffer	N/A
Thermal Sensor	✓
DEVSLP Mode	<5mW
ATA Security	✓
S.M.A.R.T.	✓
TRIM	✓
Vibration	20G (7~2KHz)
Shock Resistance	1500G@0.5ms
MTBF	>3 million hours

# Dimensions

Unit: mm

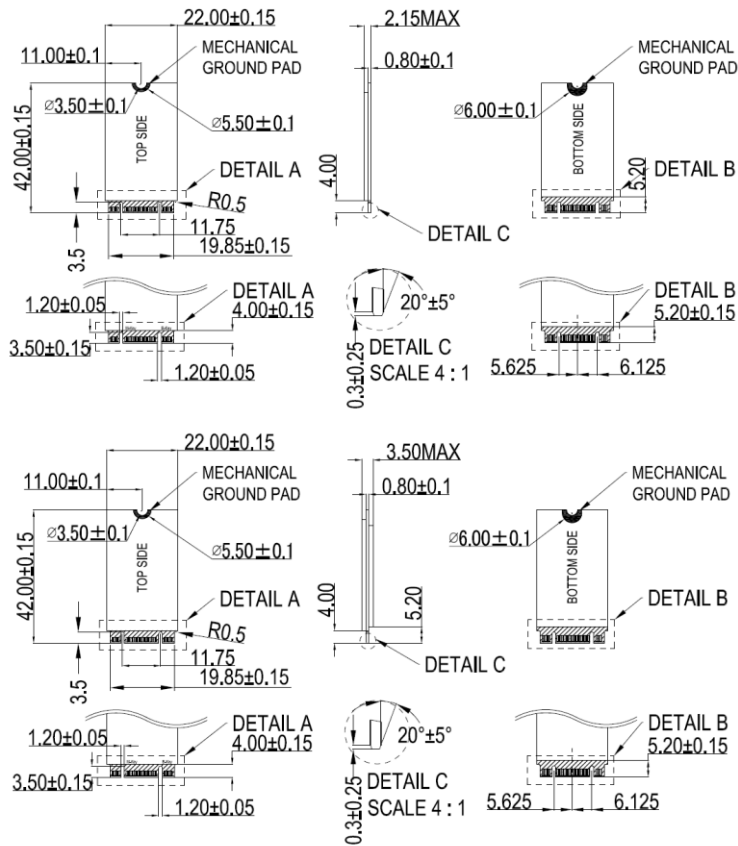

## Ordering Information

Capacity	Commercial (0°C~70°C)	Extended (-25°C~85°C)	Industrial (-40°C~+85°C)
8GB	FE24S-08GTBS4X2C1	FE24S-08GTBS4X2E1	FE24S-08GTBS4X2W1
16GB	FE24S-16GTBS4X4C1	FE24S-16GTBS4X4E1	FE24S-16GTBS4X4W1
32GB	FE24S-32GTBS4X2C1	FE24S-32GTBS4X2E1	FE24S-32GTBS4X2W1
64GB	FE24S-64GTBS4X4C1	FE24S-64GTBS4X4E1	FE24S-64GTBS4X4W1